

# MARION COUNTY SURVEYOR'S OFFICE


## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 1 TWN. 14<sub>N</sub> RNG. 2<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 1-21-10  
Party Chief: Wilcoxen  
Crew: Finney  
Type of Marker: Survey Mark Nail (set per ties)  
Method of Establishment: County: 2-5-1992  
IN S.P.C. E Zone, NAD 83 (1986)  
Name: 14020104  
N: 492 618.788 0(m)  
E: 48 302.991 0(m)

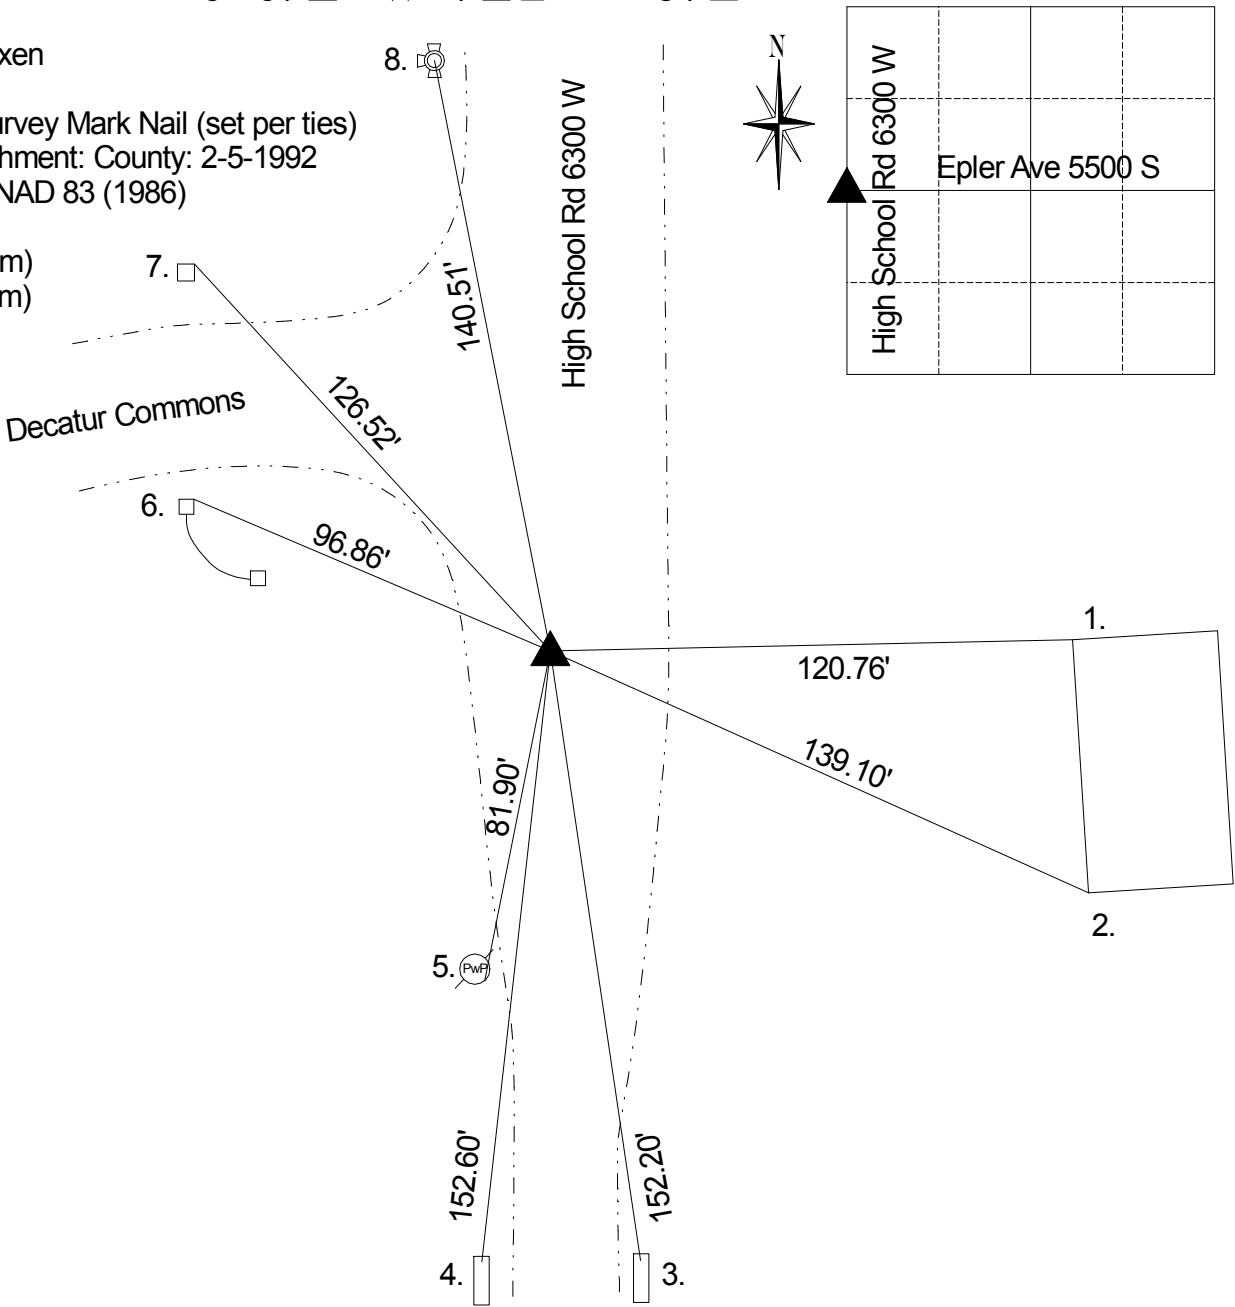

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 10" beech bearing S 12 E 19 links and a 14" dogwood bearing N 12 W 9 links (Marion County Atlas p. 1). A survey by D.B. Hasbrook on March 19, 1855 indicates no stone but the following witnesses: 24" beech bearing E 62 links and a 16" poplar bearing N 60 W 43 links (Decatur Legal Book p. 12). A survey by H.B. Fatout on April 30, 1875 indicates no stone but the following witnesses: 18" hickory bearing N 67 W 59 links and a 16" poplar bearing N 60 W 43 links (Decatur Legal Book p. 12). A survey by John Coyner on April 5, 1898 indicates a stone with no witnesses (Decatur Legal Book p. 38). Hylden on 10/1/1974 called a stone. Miller on 7/28/75 called a RR spike over steel pin. Cleveland on 5/12/80 called a PK nail over RR spike. Wilcoxen on 7/2/85 called a PK nail. Whiteside on 2/5/92 called a PK nail over spike. Wilcoxen on 7/12/1997 called a PK nail. Kiste on 9/28/2000 called a PK nail. Wilcoxen on 5/12/05 called a PK nail. Wilcoxen on 1/21/10 called a survey marker nail set.

REF.	DISTANCE	DESCRIPTION
1.	120.76'	NW corner of 5521 High School Road stone
2.	139.10'	SW corner of 5521 High School Road stone
3.	152.20'	Cut 'x' N end of headwall
4.	152.60'	Cut 'x' N end of headwall
5.	81.90'	PK nail Se PwP #70-713 12" up
6.	96.86'	NE brick column
7.	126.52'	NE brick column
8.	140.51'	Top nut of fire hydrant